


*"Demanded by Those Who Know Quality"*

# Pull Behind Leaf Vacuums

STANDARD FEATURES:

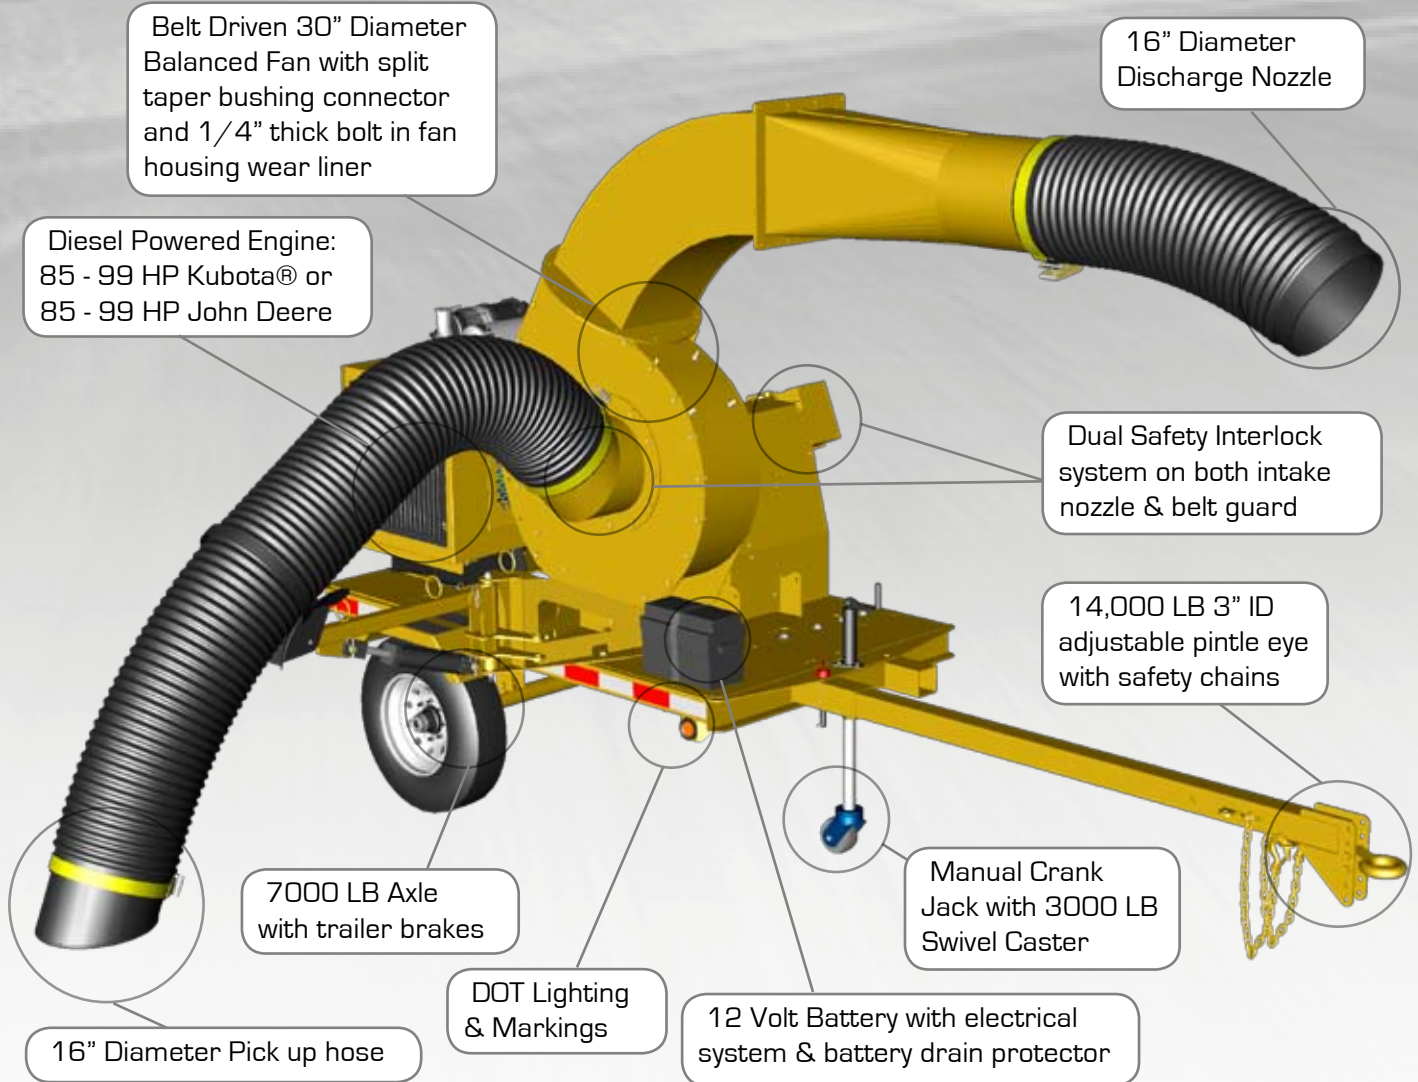

Newly designed from the ground up, the Bonnell Leaf Vacuum has been developed with features in mind. Honoring Bonnell's heritage of service, quality, and building to customer's needs, the Leaf Vacuum from Bonnell offers a profusion of options to fit your specific application.

All of the optional equipment on the Bonnell Leaf Vacuum Series are designed as bolt on features, allowing you to add them to your machine as funds permit, or as needs change. Left hand or right hand operation, manual operation or electric over hydraulic, we have it.

Safety and compliance features are standard on the Bonnell units. Each Bonnell Leaf Vacuum is provided with a Certificate of Origin, DOT compliant lighting and markings, trailer brakes, safety interlock system, battery protector, and fluid tanks fabricated, tested, and inspected in DOT certified facilities. All Bonnell Leaf Vacuums are with-in legal towing width when the nozzle is stowed, leaving you worry free while on the road.

From base model to fully featured model, the quality standard you have come to expect from Bonnell is there. We aim to please!

# Specifications

Weight, Base Model	4800 LBS
Fuel Tank	38 US Gallons
Hydraulic System (if equipped)	2.8 GPM @1000 RPM, Cap. 10 US Gallons
Hydraulic Tank Only (if equipped)	7 US Gallons
Wetting System (if equipped)	100 US Gallons
Engine, Kubota V3600	84.5 BHP @2600 RPM
Engine, Kubota V3800	99.2 BHP @2600 RPM
Engine, John Deere ES30159	85 BHP @2400 RPM
Engine, John Deere ES30161	99 BHP @2400 RPM
Battery	12 Volt, 1190 AMP, 950 CCA
Axle, AL-KO	7000 LB with Electric Brakes
Tires	8T23580R16, Load Range E
Engine Pulley	7.10" Diameter, 2-1/4" Shaft
Fan Driven Pulley	6.30" Diameter, 2-3/16" Shaft
Fan	30 Dia. Std, 32" Dia. optional
Engine to Fan Speed Ratio	1:1.127 (2600 Engine RPM = 2930 Fan RPM)
Belt	5H5VX1150 (115")

Machine shown here includes:

Optional left hand pick-up, dual tongues for offset operation, operator's seat, full electric over hydraulic controls, hydraulic trailer jack, wetting system, directional light bar & flasher, and spare tire.

Standard paint color, 7000 LB axle, and underslung fuel tank.



Sold By:



1385 Franklin Grove Rd. • Dixon, IL 61021 • www.bonnell.com  
 (815) 284-3819 • (800) 851-9664 • Fax (815) 284-8815

Bonnell Industries reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used herein. © 2006 Bonnell Industries, Inc.

REV080109

# Options

- Engines:
- 85 HP Kubota® Standard
  - 99 HP Kubota®
  - 85 HP John Deere®
  - 99 HP John Deere®

Transfluid Coupler in lieu of standard clutch

Left hand Pick-up (shown at left)

32" Diameter Fan

1/4" Steel Wear Liner on Discharge Elbow

Hydraulics:

- Swivel & Float Discharge with 12 volt electric over hydraulic control
- Full Hydraulic Swing (manual controls), ride on operator's seat
- Full Hydraulic Swing (electric controls), ride on operator's seat:



Trailer Jacks (All trailer jacks provided with 3000lb steel swivel caster):

- Manual crank (standard)
- Hydraulic (standard on full hydraulic units)
- Electric

100 gallon wetting system for dust control:



Safety lighting:

- Yellow flashers:
- Directional light bar:
- Strobe lighting



Spare Tire:



Intercom system  
 Ball Hitch Couplers  
 Special Paint Colors



POWERED BY



JOHN DEERE

