


572 / 574 ROAD MAINTAINER

ROAD MAINTENANCE

FEATURES & BENEFITS:

- 1 Extra large capacity - 10' cutting width, 13" depth, and 24" throat width between inward delivery blades
- 2 No tools required for adjustment of finish blade
- 3 Full drag weight transfers 5,700 lbs. to the road surface
- 4 Optional power finishing blade swing and strike off features
- 5 Independently controlled rear wheels for enhanced control of road crown and material flow

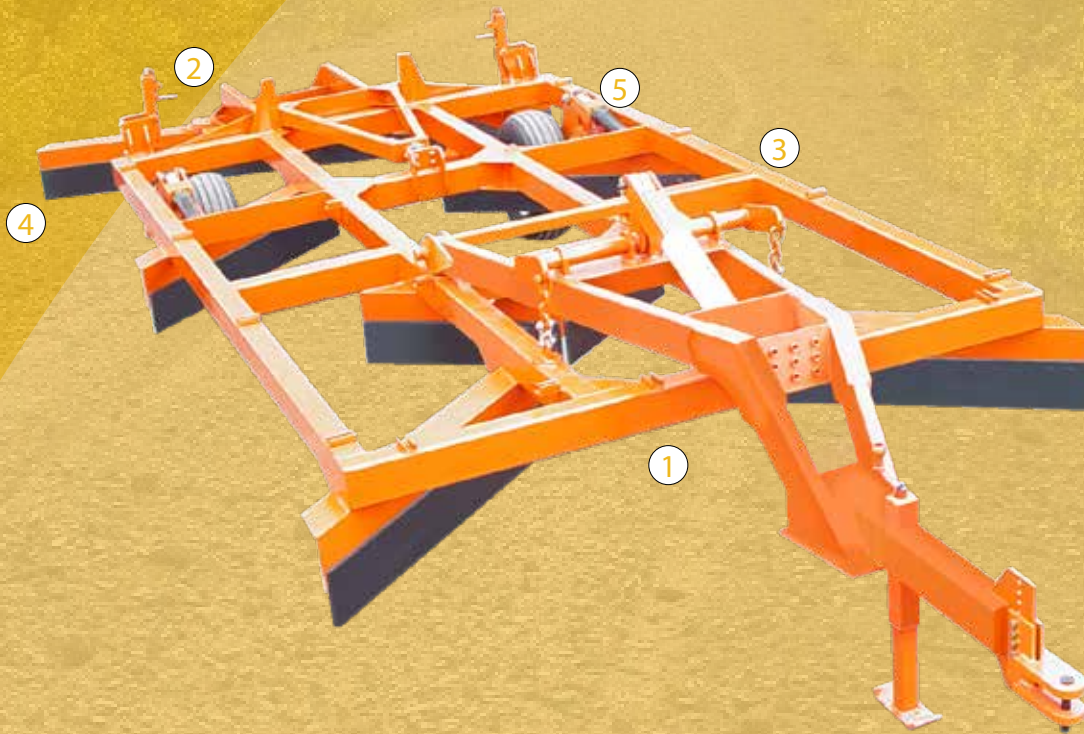

572 / 574 ROAD MAINTAINER OPTIONS

1. Hydraulic raise and lower rear finishing blade (Model 572HRL)
2. Scarifier Blades
3. Hydraulic swing only of rear finishing blade
4. Quick change spare tire, hub and spindle assembly, shown with optional radial tire
5. Hitches: pintle hook type
6. End Shoes - for any or all of the inward delivery blades (can help in widening roads up to 6" per pass)
7. Radial tires



Model 574 HRLS with front carriage and draw bar
Front swivel axle and draw bar reduce carry weight on pull vehicle, and promotes easy hook up



572 / 574 ROAD MAINTAINER SPECIFICATIONS

MODEL NUMBER	572	574
Weight	5,700 lbs	6,000 lbs
Length	29'	31'
Length of Working Section	23'	23'
Throat Depth	13"	13"
Cutting Width	10'	10'
Tires	(2) 11L x 15", 8 ply	(4) 11L x 15", 8 ply
Tractor Horsepower Requirements	110 hp	110 hp
Lifting Cylinders	(1) 4" x 10" Front Lift, (2) 3" x 10" Rear Lift	
Front Hitch	Clevis type- (572)- 10" of Adjustment on 1-1/4" Centers	
Finish	Omaha Orange	



www.bonnell.com • (800) 851-9664 • info@bonnell.com
1385 Franklin Grove Rd. • Dixon, IL 61021



AUTHORIZED DEALER: