

POWER REVERSING UNDERBODY SCRAPER

FEATURES & BENEFITS:

- 1 Exclusive "zero insertion force" spring assembly for safer disassembly
- 2 Twin down pressure cylinders with spring cushion provide positive down pressure on the road surface
- 3 Power Reversible up to 45 degrees left or right with 4" Twin Power Reverse Cylinders
- 4 Greasable center pin
- 5 Exclusive polymer sleeve linings for easier reversing cylinder pin removal
- 6 1" thick steel reversing table & mounting plates
- 7 1" x 20" or 1" x 17" moldboard



POWER REVERSING SCRAPER SPECIFICATIONS


Moldboard thickness: 1"
 Model # & Moldboard length: Model UBS120-2prpd 10'
 Model # & Moldboard length: Model UBS132-2prpd 11'
 Model # & Moldboard length: Model UBS144-2prpd 12'
 Moldboard height: 20"
 Downpressure cylinders: 3" bore x 10" stroke w/nitrited rods
 Reversing cylinders: 4" bore x 14-1/2" stroke with nitrited rods
 Reversing table: high strength steel
 Hinge rod: 2-1/2" diameter x 97" long
 Springs: 7/8" x 6" x 18-1/2"
 Power reverse angle: up to 45 degrees left or right

The Bonnell Power Reversing Under Body Scraper is available in 10', 11' or 12' lengths, and is power reversible up to 45 degrees left or right.

The Scraper has a 1" thick 1045 steel moldboard with a 17" tall, smooth formed inside radius. The scraper is equipped with 4" twin power reverse cylinders and a 1" thick reversing table and side mount plates, providing a heavy duty, yet lightweight design. Twin down pressure cylinders with spring cushion provide positive down pressure on the road surface. Painted black with conspicuity tape provided for safety.

FEATURES & OPTIONS:

- 1 Polymer Bushing Detail
- 2 Curb Shoes
- 3 Spring Canister Bolt Detail
- 4 Fixed Discharge (One-Way)

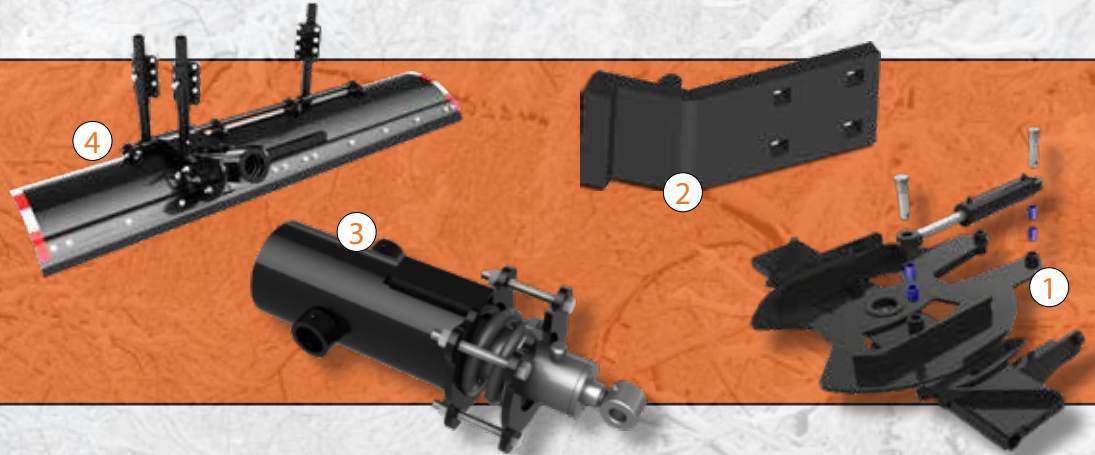

AUTHORIZED DEALER:

www.bonnell.com • (800) 851-9664 • info@bonnell.com
 1385 Franklin Grove Rd. • Dixon, IL 61021



FIXED UNDERBODY SCRAPER

FEATURES & BENEFITS:

1. Mount for Left or Right Discharge (fixed)
2. Exclusive "zero insertion force" spring assembly for safer disassembly
3. 5/8" x 20" smooth formed moldboard
4. Greasable 1-9/16" Diameter Shaft
5. Down pressure cylinder with spring cushion provides positive scraping pressure on the road surface



FIXED UNDERBODY SCRAPER SPECIFICATIONS

Moldboard thickness: 5/8"
 Model # & Moldboard length: Model UBS120-2FPD 10'
 Model # & Moldboard length: Model UBS132-2FPD 11'
 Model # & Moldboard length: Model UBS144-2FPD 12'
 Moldboard height: 20"
 Downpressure cylinders: 3" bore x 10" Stroke
 Hinge rod:..... 1 9/16" diameter x 70 1/2" long
 Springs: 7/8" x 6" x 18-1/2"



OPTIONS & FEATURES:

- ① Power reversing Scraper
- ② Curb Shoes
- ③ Spring Canister Bolt Detail
- ④ 1" Thick Moldboard



AUTHORIZED DEALER:

www.bonnell.com • (800) 851-9664 • info@bonnell.com
 1385 Franklin Grove Rd. • Dixon, IL 61021

